Historic, Archive Document

Do not assume content reflects current scientific knowledge, policies, or practices.



83 EX ET-16



May 1934

A STAND USED IN PHOTOGRAPHING OBJECTS

By F. W. Poos, Division of Cereal and Forage Insects. Bureau of Entomology, U. S. Department of Agriculture

A stand for use in photographing objects with the camera in a vertical, or nearly vertical, position is very easily constructed and will be worth many times the cost of its construction in time saved and in convenience, when photographing objects at close range from a tripod with tilting top, if a good camera stand is not available. Such an object stand is figured in the accompanying illustration.

The over-all dimensions of the base, which was made of lumber 1-1/4 inches in thickness, are 22 inches by 16 inches. The slotted upright pieces (A - B) are 1 inch thick, 1-1/2 inches wide, and 20 inches in height and support, by means of thumb bolts, the frame which holds the ground or clear glass (18" by 14") upon which the objects are placed for photographing. The frame surrounding the glass is 1-1/2 inches wide and 1-1/8 inches thick, and contains a groove 1/8 inch deep and 1/2 inch wide for holding the glass within the frame.

This stand may, of course, be made larger, or the upright pieces only may be made longer in order to permit a greater variation in the distance of the object from the camera. However, the size of the camera and of the tripod used should be taken into consideration, as the stand can readily become too large and unwieldy for satisfactory use because of its interference with the legs of the tripod.


A STAIN USED IN PROPERTY OF STAINS OF STAIN ASOVE

by F. W. Poos. Division difficients that Forego Insects.
Buruen of Entomology, U. S. Department of Agriculture

A diand for non-ly vertical, position is very easily constructed and will not train many times the cost of his construction in time sayed and his construction in time sayed and in constitutions, when photographing objects at circu tange from a tripod with relating top, if a good camera stand is not available. Such an object such is figured in the accompanying liturization.

The over-all discussions of the case, which was made of lumber 1-1/4 unches in thickness, are 22 inches by 16 inches The slotted upright [14 - 2] are 1 inch thick, 1-1/2 inches wide, and 20 inches in called and support, by seams of thumb belte. The frame which holds the count or clear glass (12° by 14°) upon which the objects are placed for clear glass (12° by 14°) upon which the objects are placed for footegraphing. The frame surrounding the glass is 1-1/2 inches wide and 1-1/8 inches wide and 1-1/8 inches wide and 1-1/8 inches thick the frame.

This stand may, of course, he made larger or the upraght places out as me and the course of the other to primit a greater variation is the disciplant of the object from the values. However, the case of the unders and of the tripod used should by taken into consideration, as the stand and consists before the large and unwising for antistacions and because of the large and unwising for antistacions and because of the large and unwising for antistacions and because of the large.

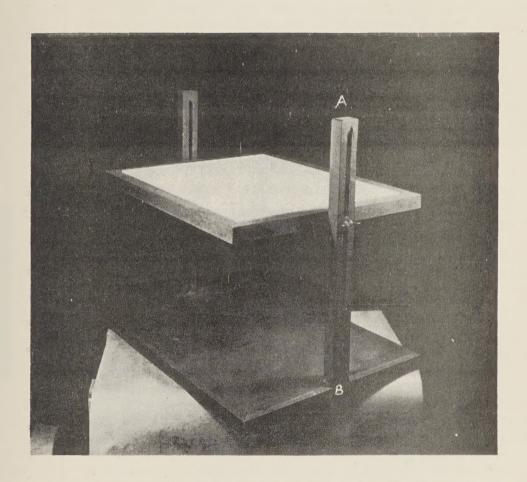

Stand used for photographing objects from above

